

S E A C O N®



66 SERIES

UNDERWATER ELECTRICAL DRY-MATE CONNECTORS

SECTION	PAGE
66 SERIES	
Introduction	66 SERIES 3
Availability	66 SERIES 3
Applications	66 SERIES 3
Testing	66 SERIES 3
Environmental Testing Capability	66 SERIES 3
Part Number System	66 SERIES 3
General Information.....	66 SERIES 3
 Dimension Details:	
6601-CCP	66 SERIES 4
6606-FCR	66 SERIES 5
5507-BCR	66 SERIES 5
 Interface Details:	
6607-BCR	66 SERIES 6
6606-FCR	66 SERIES 6
 Contact Configurations	66 SERIES 7

INTRODUCTION

SEACON (europa) Ltd is pleased to announce the release of a new range of underwater electrical dry-mate connectors to compliment the existing 55 SERIES. The new 66 SERIES of reverse gender connectors enable power to be applied to the bulkhead connector yet still be safe to use. Manufactured utilizing tried and tested methods and materials, this new range also incorporates shorter locking sleeves to ensure easier mating capability.

Other key features include:-

- Industry Standard Compatibility
- Proven Sealing Technology
- Heavy Duty Stub Acme Threads*
- Pressure Rated Blanking Caps available

AVAILABILITY

The 66 SERIES is currently available in two shell sizes; 16 and 20 with two configurations (8#16/13#16), however more configurations will be added to the range if required.

APPLICATIONS

This new connector range is suitable for a variety of applications including ROV's, underwater cameras, diver communications, lights and pan and tilts.

TESTING


Please contact SEACON® for details.

SPECIAL ASSEMBLIES

SEACON® maintains all facilities necessary to furnish complete underwater and environmental electrical connector/cable systems, including Research and Development, Engineering, Manufacturing, Quality Control and Pressure Testing. As well as supplying our standard 'off-the-shelf' items, we have the capability to design and manufacture **SPECIAL CUSTOMIZED CONNECTORS AND CABLE ASSEMBLIES** to suit your individual needs. SEACON® also prides itself with the ability to perform stringent quality conformance testing procedures which are in accordance with the MIL-SPEC programs.

Please contact SEACON® for further information

PART NUMBER SYSTEM - EXAMPLE

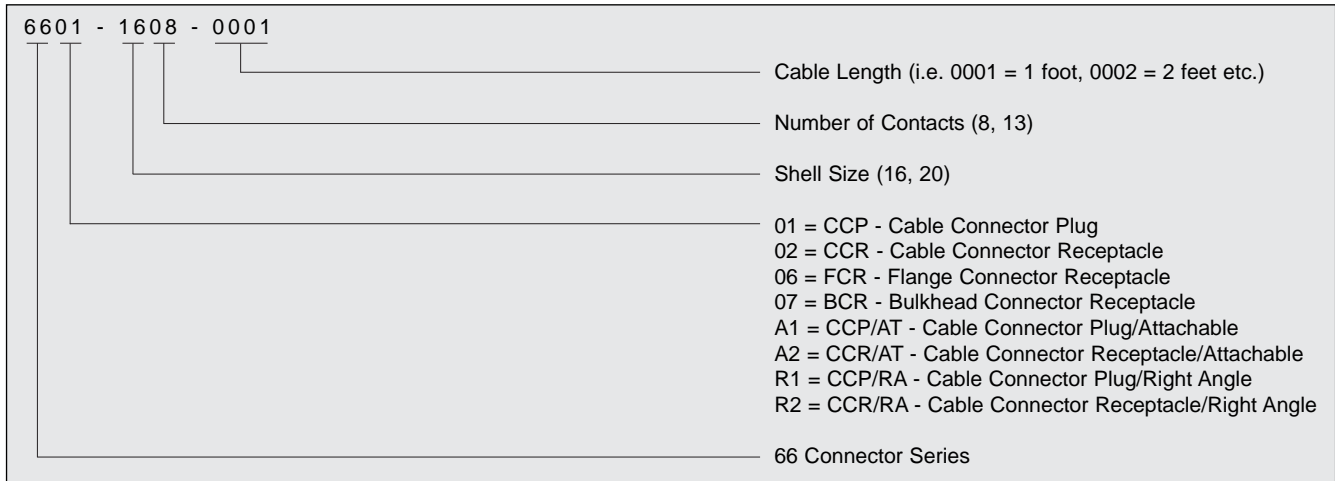

GENERAL INFORMATION

COMPONENT	MATERIAL
CONNECTOR BODY BCR/CCP/FCR	316L Stainless Steel Shell / Neoprene internals
CONTACTS	Gold plated per MIL-G-45204
O-RING	Nitrile N70
ENGAGING NUT	316L Stainless Steel coated with special anti-galling compound
IN-LINE CABLE	Neoprene. Other materials are also available. Please contact SEACON® for details
SPIRAL RETAINING RING	316L Stainless Steel


CATEGORY	VALUE
OPEN FACE PRESSURE	Up to 10,000 psi
MATED PRESSURE	10,000 psi
VOLTAGE RATING	600 VDC / 440 VAC
CURRENT	7 amps (contacts 13 amps) and cable dependent
BULKHEAD MOUNTING TORQUE	16 shell size = 125 inch/lbs* 20 shell size = 165 inch/lbs*

NOTE:

· * Torque values refers to installation into dry metal threads.

66 SERIES
6601-CCP



66 SERIES Cable Connector Plug
Mates with 66-BCR/CCR/FCR
Dummy Connector: 66-DSR

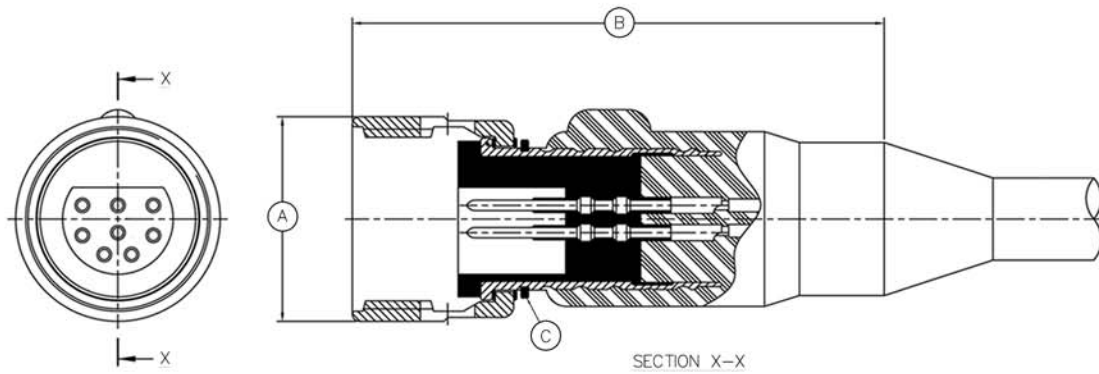

CONNECTOR	A - Ø (INCHES)	B - LENGTH (INCHES)	C
6601-16	1.17	3.04 APPROX	SPIRAL RETAINING RING
6601-20	1.45	3.70 APPROX	CIRCLIP

66 SERIES
6606-FCR



66 SERIES Flanged Connector Receptacle
Mates with 66-CCP
Dummy Connector: 66-DSP

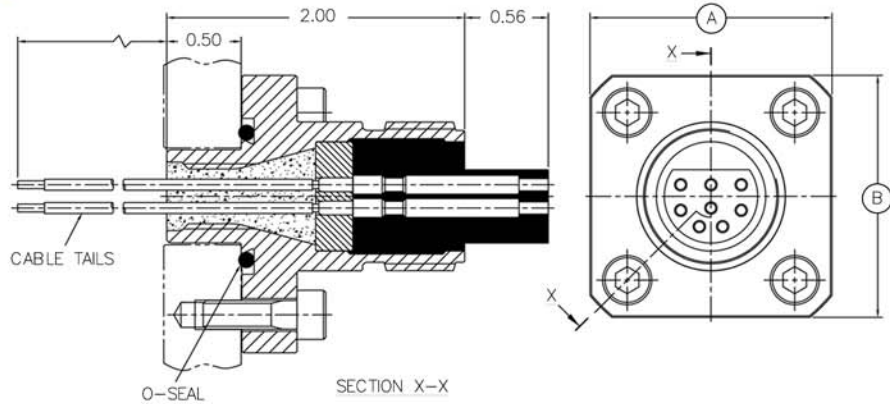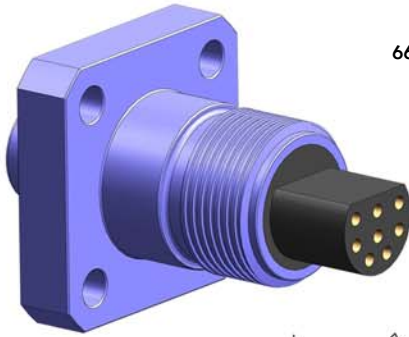

CONNECTOR	A - (INCHES)	B - (INCHES)
6606-16	1.625	1.625
6606-20	1.75	1.75

66 SERIES
6607-BCR


66 SERIES Bulkhead Connector Receptacle
Mates with 66-CCP
Dummy Connector: 66-DSP

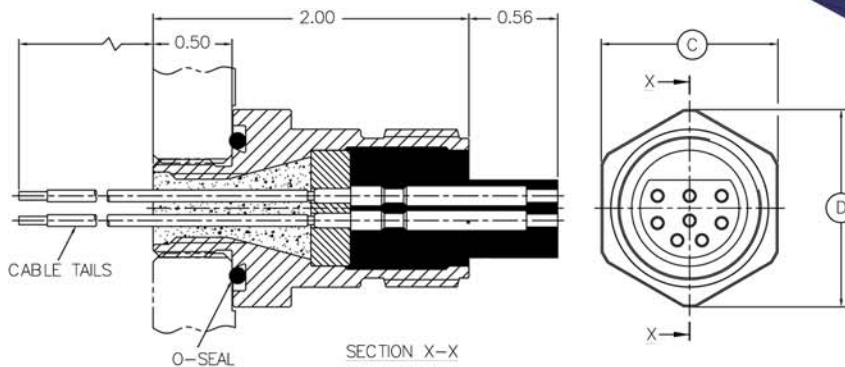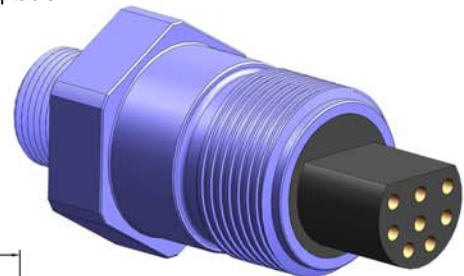

CONNECTOR	C - (INCHES)	D - (INCHES)
6607-16	1.12	1.25
6607-20	1.25	1.40

66 SERIES
6607-BCR
INTERFACE DETAILS

66 SERIES Bulkhead Connector Receptacle

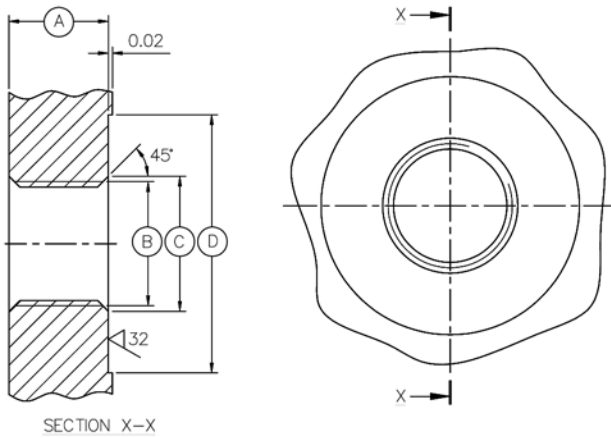


BCR INTERFACE MOUNTING INFORMATION

CONNECTOR	A - MIN (INCHES)	B - THREAD	C - Ø (INCHES)	D - MIN Ø (INCHES)
6607-16	0.50	5/8-18 UNF 2B	0.68	1.30
6607-20	0.50	5/8-16 UNF 2B	0.79	1.44





66 SERIES
6606-FCR
INTERFACE DETAILS

66 SERIES Flange Connector Receptacle

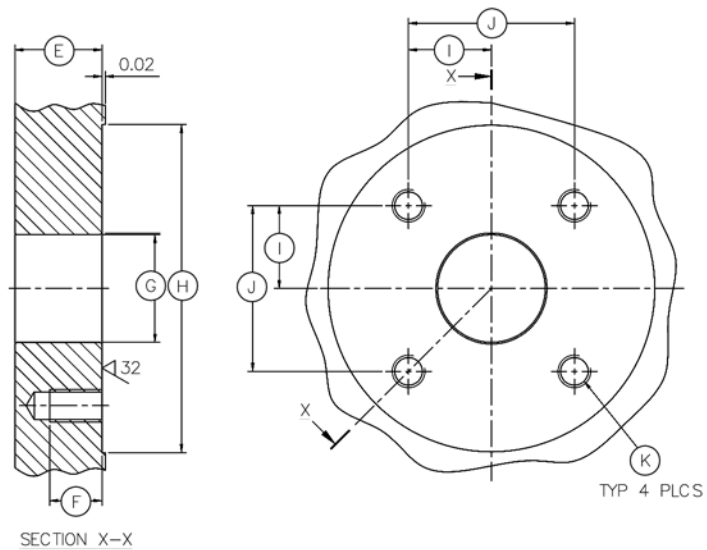

FCR INTERFACE MOUNTING INFORMATION

CONNECTOR	E - MIN (INCHES)	F - TYPICAL Ø (INCHES)	G - Ø (INCHES)	H - Ø (INCHES)	I - (INCHES)	J - (INCHES)	K - THREAD	RECOMMENDED FIXING SCREW LENGTH
6606-16	0.525	0.315	0.65	2.13	0.5625	1.125	M5x0.8p 6H	16mm
6606-20	0.625	0.375	0.77	2.33	0.625	1.25	M5x0.8p 6H	18mm

SIZE	66 SERIES CONTACT CONFIGURATIONS AVAILABLE (CCP FACE VIEW ONLY - NOT TO SCALE)
16	 <p>66XX-1608</p>
20	  <p>66XX-2008 66XX-2013</p>
	<p>KEY</p>  #16 SOCKET CONTACT

NOTES:

- Shell size 16 only available in 8#16 configuration.

HANDLING PROCEDURES AND SPECIAL CAPABILITIES



SEACON (europe) LTD
Seacon House, Hewett Road,
Gapton Hall Industrial Estate,
Great Yarmouth, Norfolk, NR31 0RB, UK.
TEL: +44 (0) 1493-652733
FAX: +44 (0) 1493-652840
E-Mail: sales@seaconeurope.com
Website: www.seaconeurope.com



SEA CON®
1700 Gillespie Way,
El Cajon, California 92020, USA.
TEL: +1 (619) 562-7071
FAX: +1 (619) 562-9706
E-Mail: seacon@seaconworldwide.com
Website: www.seaconworldwide.com



SEA CON US GULF AREA SALES OFFICE
21925 Franz Road, Suite 401,
Katy, Texas 77449, USA.
TEL: +1 (281) 599-3509
FAX: +1 (281) 599-3517
E-Mail: gulfcoastsales@seaconworldwide.com
Website: www.seaconworldwide.com



SEA CON US EAST COAST SALES OFFICE
50 Airport Road,
Westerly, RI 02891, USA.
TEL: +1 (401) 348-0155
FAX: +1 (401) 348-0227
E-Mail: eastcoastsales@seaconworldwide.com
Website: www.seaconworldwide.com



SEA CON FLORIDA SALES OFFICE
Building B, Suite 22,
3959 South Nova Road,
Port Orange,
Florida 32127, USA.
TEL: +1 (281) 802-5504
E-Mail: steven.thumbeck@seacon-ap.com



SEACON ADVANCED PRODUCTS, LLC
1321 Nelius Road, P.O. Box 767,
Bellville, Texas 77418, USA.
TEL: +1 (979) 865-8846
FAX: +1 (979) 865-8859
E-Mail: sales@seacon-ap.com
Website: www.seacon-ap.com



SEACON BRAZIL
Rua Conde de Bonfim 120 sala 212,
Tijuca, Rio de Janeiro,
Brazil, CEP: 20520-053.
TEL: +55 (21) 8849-3336
E-Mail: renata@seacon-ap.com



SEA CON GLOBAL PRODUCTION
Callejon Terrazos #8, Local 2-C,
Las Brisas 1ra. Seccion,
Tijuana, B.C., Mexico C.P. 22610.
TEL: +52 (664) 626-2726
FAX: +52 (664) 686-8922
E-Mail: sales@seaconglobal.com
Website: www.seaconglobal.com
Dial from U.S.A. TEL: +1 (619) 308-7901
TOLL FREE: (888) 562-7072
FAX: +1 (619) 308-7900



SEACON PHOENIX, LLC.
15 Gray Lane, Suite 108,
Hopkinton Industrial Park,
Ashaway, RI 02804, USA.
TEL: +1 (401) 637-4952
FAX: +1 (401) 637-4953
E-Mail: sales@seaconphoenixllc.com
Website: www.seaconphoenixllc.com

Even though these procedures appear simple, only qualified technicians should perform the installation and maintenance.

Connectors are designed for installation on one atmosphere vessels. Contact **SEA CON®** for recommendations if using compensated vessels.

INSTALLATION PROCEDURES

Torque values referenced in this literature assume installation into dry metal threads. For other applications, please contact **SEA CON®** for recommendations.

BULKHEAD CONNECTOR (BC): The BC may be installed using one of two methods. The preferred method is to spotface the bulkhead surface and thread the hole, then screw the connector by means of a nut and washer. The bored hole (or threaded hole) should be free of any "burrs" and all o-ring sealing surfaces polished to a number 32 finish. Lubricate the BC o-ring with an appropriate silicon spray or grease before installing. This lubrication should be applied to form an adequate film. Excessive lubrication is detrimental to the operation of the connector. Bulkhead nut, if used, should not be over-torqued.

IN-LINE CONNECTOR: Lubricate the sealing areas around the male pins, using an appropriate silicon spray, or grease lightly.

CARE AND MAINTENANCE

The **55 & 66 SERIES** connectors require very little maintenance. They are designed to be used in harsh environments and thus limited amounts of dirt and grit do not affect their performance.

It is recommended that, upon disconnecting or retrieving the system, the connectors be cleaned, to storage (if possible, remate with dummy plugs). Prior to deployment the following maintenance procedure is recommended:

1. Demate the connector set.
2. Flush connector interface with fresh water (deionized water if available), remove all dirt, grit and grease.
3. Inspect for damage in sealing areas, excessive corrosion, debonding of the cable and connector interface and cuts in the cable jacket.
4. Apply thin film of dielectric compound (DC) grease, silicon based, to sealing areas of male connector and across the face of the female connector*. If the BC is removed from its housing then replace facial o-ring and make sure that o-rings are lubricated and in good condition.
5. Mate the connector halves, wipe away any excess grease off the interface line of the mated set.

* **CAUTION:** The use of some oil-based propellants in spray cans can cause conductivity problems in neoprene.

CABLE AND CONTINUITY PRESERVATION

Avoid sharp bends in cables. Cables subjected to vibration or exposed to seawater drag should be adequately clamped to prevent conductor fatigue and ultimate failure.

All reasonable efforts have been taken to ensure that the information contained herein is accurate at the date of publication, but no representation or warranty as to the accuracy or completeness of such information is intended or to be implied by its inclusion herein. Any and all representations and warranties pertaining to the information and products referred to herein shall be set forth in **SEA CON®** standard sales order form. In addition, **SEA CON®** reserves the right to make changes to the contents hereof without notice, therefore it is suggested that at the time of inquiry, the appropriate sales office or factory be contacted directly for verification of published specifications and products availability.

© 2011 **SEACON (europe) LTD**
ALL RIGHTS RESERVED