

SEACON[®]



Micro MINI-CON

UNDERWATER ELECTRICAL DRY-MATE CONNECTORS

SECTION	PAGE
Micro MINI-CON SERIES	
Introduction	MIN 23
Availability	MIN 23
Applications	MIN 23
Testing	MIN 23
Part Number System	MIN 23
General Information	MIN 23
Dimension Details:	
MM-BCR	MIN 24
MM-CCP	MIN 24
Interface Details	MIN 25
Contact Configurations	MIN 26

INTRODUCTION

To meet the ever increasing demand for smaller high density connectors, **SEA CON®** developed the Micro MINI-CON series. This miniature connector series incorporates all of the engineering concepts and design features of our highly successful MINI-CON range, but in a smaller configuration beginning at 1/2" in diameter.

In order to maintain the miniaturization and provide minimal wall thickness, special o-rings were developed to seal the interfaces on all plugs and receptacles. The inserts are retained in the connector shells using custom designed and manufactured retaining rings made of 17/4 PH Stainless Steel.

In many applications a flange mounted receptacle is preferred instead of a screw-in type. To fill this need, **SEA CON®** has developed a modular flange that adapts a standard BCR connector for use as an FCR. An added benefit of this design is the ability to clock the FCR in several orientations with respect to the bolt pattern. This can be however **SEA CON®** has designed a modular flange that fits over the screw-in type eliminating the need to purchase a separate shell, again without compromising performance.

AVAILABILITY

The Micro MINI-CON dry-mateable connector range is available in 6 different shell sizes ranging from 4 to 202 contacts with a pressure rating of 13,500 psi mated and is also available in a fiber optic configuration (please see our Optical Dry-Mate Hybrid section). In addition, this series also offers the option of right angles, over-molding of the cable plug, field installing the cable using boots or terminating with a Pressure Balanced Oil-Filled (PBOF) system.

APPLICATIONS

The Micro MINI-CON is suitable for a variety of applications including cameras and lights or any application where size is an issue.

TESTING

The Micro MINI-CON range of connectors have been subjected to the following testing:

Environmental

Humidity (Steady State)

- Tested in accordance with MIL-STD-202, Method 103.

Thermal Shock

- Tested in accordance with MIL-STD-202, Method 107.

Mechanical Shock

- Tested in accordance with MIL-S-901, Grade A, Class 1.

Hydrostatic Pressure

- Tested in accordance with MIL-STD-202, Method 1006.

Physical

Vibration

- Tested in accordance with MIL-STD-202, Method 301.

Electrical


Dielectric Withstanding Voltage

- Tested in accordance with MIL-STD-202, Method 301.

Insulation Resistance

- Tested in accordance with MIL-STD-202, Method 302.

PART NUMBER SYSTEM - EXAMPLE

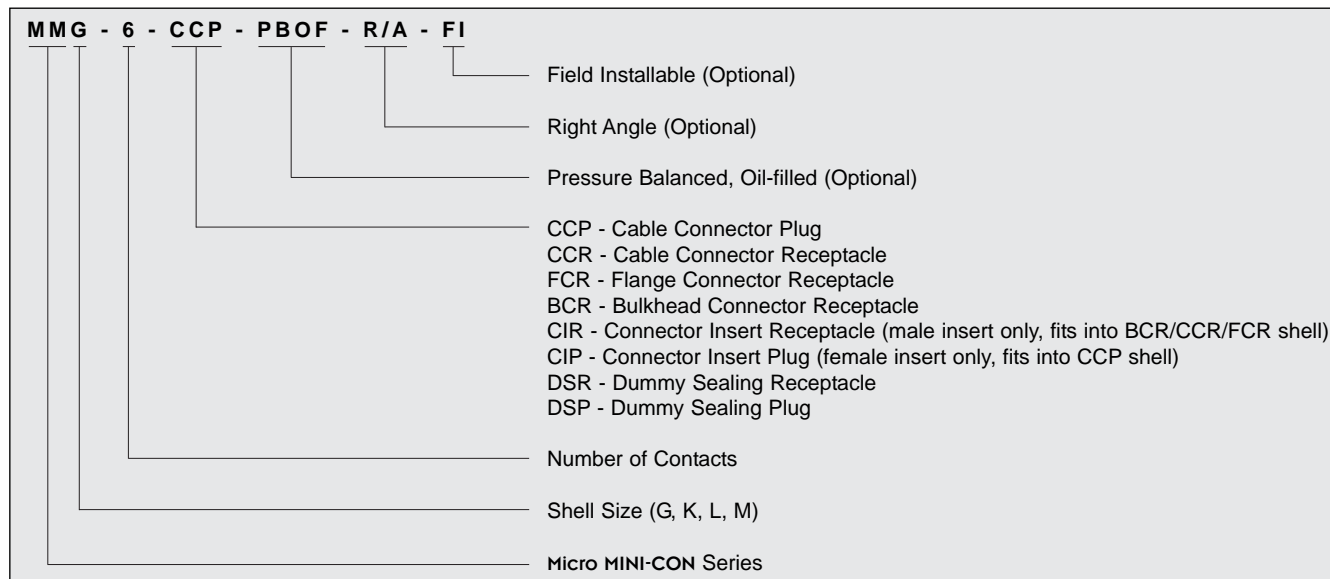

GENERAL INFORMATION

COMPONENT	MATERIAL
BULKHEAD BODY (BCR/FCR)	Ti6A14V
CCP BODY	Ti6A14V c/w Ti Grade 2 Engaging Nut
CONTACT INSERT	Glass Filled Epoxy MIL-G-24325
ELECTRICAL CONTACTS	Copper Alloy Gold Plated per MIL-G-45204
O-RINGS	Nitrile (formerly known as Buna N)


OPTIONS:

- Pressure Balanced Oil Filled (PBOF).
- Higher voltages.
- Available in alternative materials.
- Glass sealed CIR design available.

CATEGORY	VALUE
OPEN FACE PRESSURE	3,000 psi (inserted prepared)
MATED PRESSURE	Up to 13,500 psi mated and potted
VOLTAGE RATING	300 VDC although higher voltage ratings are available. Please contact SEA CON® for further information
CURRENT RATING	Up to 4 amps dependent on contact size and cable



Micro MINI-CON SERIES MM-BCR/FCR

Micro MINI-CON Bulkhead Connector Receptacle/Flange Connector Receptacle
Mates with MMG-CCP
Dummy Connector: MMG-DSP

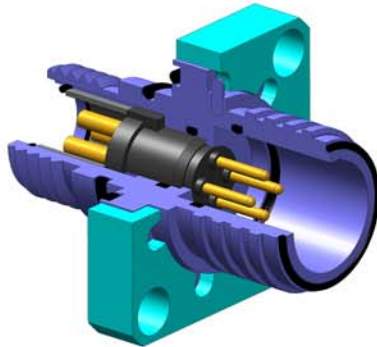

Micro MINI-CON SERIES MM-CCP

Micro MINI-CON Cable Connector Plug
Mates with MMG-BCR/FCR/CCR
Dummy Connector: MMG-DSR

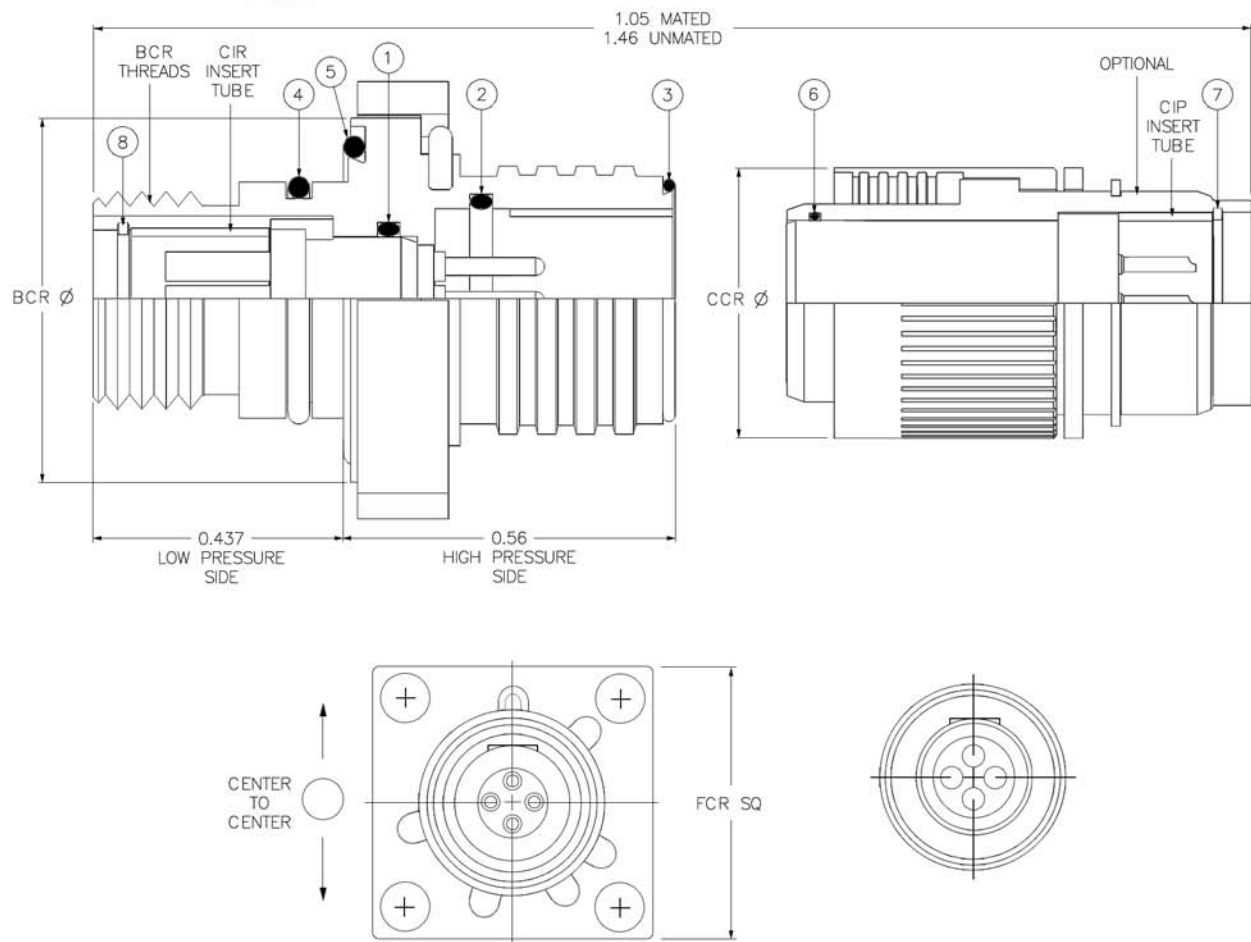
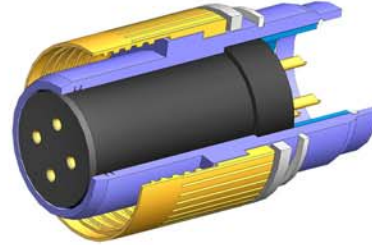


SIZE	OD BCR	OD ENGAGING NUT	FCR SQUARE	BCR THREADS	1 - O-RING	2 - O-RING	3 - O-RING	4 - O-RING	5 - O-RING	6 - O-RING	7 - RET RING CCP	8 - RET RING B/F/CCR
G*	0.625	0.500	0.750	0.375-24 UNF	SS-201	SS-301	SS-303	SS-302	SS-404	SS-201	MMRR-25	MMRR-25
K*	0.750	0.625	0.875	0.500-20 UNF	SS-301	SS-401	SS-403	SS-402	SS-601	SS-301	MMRR-35	MMRR-35
L*	0.875	0.750	1.000	0.593-18 UNF	SS-401	SS-501	SS-503	SS-502	SS-702	SS-401	MMRR-45	MMRR-45
M	1.000	0.875	1.125	0.687-20 UN	SS-602	SS-602	SS-603	SS-602	SS-801	SS-501	MMRR-61	MMRR-64


NOTES:

· * Reverse load; insert loaded from the low pressure side as shown in drawing above. All other insert sizes are loaded from the high pressure side.

**Micro MINI-CON SERIES
MM-BCR
THROUGH BORE OPTION**
Micro MINI-CON Bulkhead Connector Receptacle



**Micro MINI-CON SERIES
MM-BCR
THREADED MOUNTING OPTION**
Micro MINI-CON Bulkhead Connector Receptacle

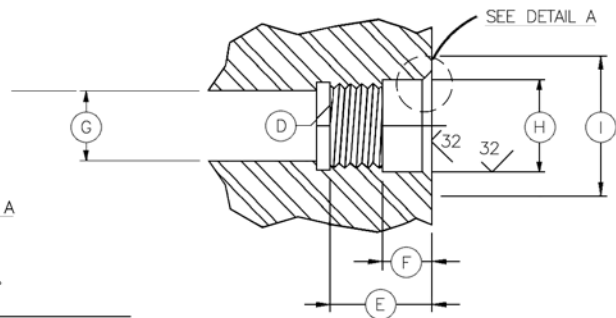


BCR INTERFACE MOUNTING INFORMATION

CONNECTOR	A - LENGTH	B - Ø	C - Ø	D - THREAD	E - LENGTH	F - Ø	G - Ø	H - Ø	I - Ø
MMG-BCR	0.250 0.156	0.408 0.407	0.62	0.375-24 UNF-2B	0.45	0.22	0.31	0.408 0.407	0.62
MMK-BCR	0.250 0.156	0.537 0.536	0.75	1/2-20 UNF-2A	0.45	0.22	0.37	0.537 0.536	0.75
MML-BCR	0.250 0.156	0.632 0.631	0.87	19/32-18 UNF-2B	0.45	0.22	0.45	0.632 0.631	0.87
MMM-BCR	0.310 0.200	0.711 0.710	1.00	0.687-20 UN-2B	0.510	0.29	N/A	0.711 0.710	1.00

**Micro MINI-CON SERIES
MM-FCR
MOUNTING DETAILS**

Micro MINI-CON Flange Connector Receptacle

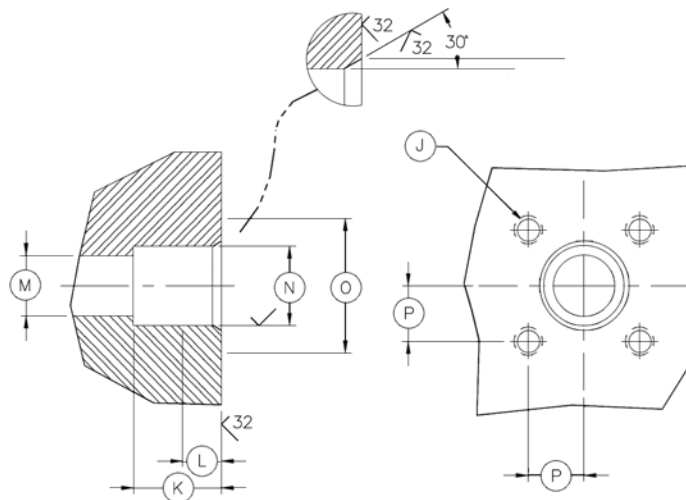

FCR INTERFACE MOUNTING INFORMATION

CONNECTOR	J - THREAD	K - LENGTH	L - Ø	M - Ø	N - Ø	O - Ø	P - Ø
MMG-FCR	4 X 4-40 UNC-2B	0.45	0.20	0.31	0.408 0.407	0.62	0.286
MMK-FCR	4 X 4-40 UNC-2B	0.45	0.20	0.37	0.537 0.536	0.750	0.343
MML-FCR	4 X 4-40 UNC-2B	0.50	0.13	0.50	0.632 0.631	0.88	0.400
MMM-FCR	4 X 6-32 UNC-2B	0.52	0.20	0.50	0.711 0.710	1.00	0.438

SIZE	Micro MINI-CON SERIES CONTACT CONFIGURATIONS (MALE FACE VIEW ONLY - NOT TO SCALE)
G	<div><div> 4#22</div><div> 8#28</div><div> 1FO*</div></div>
K	<div><div> 1#28/2#20</div><div><div> 7#22</div><div> 12#28</div></div></div>
L	<div><div> 14#22</div><div> 37#28</div></div>
M	<div><div> 26#22</div><div> 26#28</div></div>

NOTES:

- All configurations shown are the face view of the Bulkhead Connector (BC).
- Standard bulkhead contacts are male.
- Numbers are for reference only.
- For custom configurations or special applications please contact **SEA CON®**.

- * Micro MINI-CON fiber optic configuration.

HANDLING PROCEDURES AND SPECIAL CAPABILITIES

SEA CON® **SEA CON®**

1700 Gillespie Way,
El Cajon, California 92020, USA.
TEL: +1 (619) 562-7071
FAX: +1 (619) 562-9706
E-Mail: seacon@seaconworldwide.com
Website: www.seaconworldwide.com

SEA CON® **SEA CON US GULF AREA SALES OFFICE**

14511 Old Katy Road, Suite 300,
Houston, Texas 77079, USA.
TEL: +1 (281) 599-3509
FAX: +1 (281) 599-3517
E-Mail: gulfcoastsales@seaconworldwide.com
Website: www.seaconworldwide.com

SEA CON® **SEA CON US EAST COAST SALES OFFICE**

50 Airport Road,
Westerly, RI 02891, USA.
TEL: +1 (401) 348-0155
FAX: +1 (401) 348-0227
E-Mail: eastcoastsales@seaconworldwide.com
Website: www.seaconworldwide.com

SEA CON® **SEA CON FLORIDA SALES OFFICE**

Building B, Suite 22,
3959 South Nova Road,
Port Orange, Florida 32127, USA.
TEL: +1 (281) 802-5504
E-Mail: steven.thumbek@seacon-ap.com
Website: www.seaconworldwide.com

SEA CON **advanced** **SEA CON ADVANCED PRODUCTS, LLC**

1321 Nelius Road, P.O. Box 767,
Bellville, Texas 77418, USA.
TEL: +1 (979) 865-8846
FAX: +1 (979) 865-8859
E-Mail: sales@seacon-ap.com
Website: www.seacon-ap.com

SEA CON **brazil** **SEA CON BRAZIL**

Rua Conde de Bonfim 120 sala 212,
Tijuca, Rio de Janeiro,
Brazil, CEP: 20520-053.
TEL #1: +55 (21) 3592-0920
TEL #2: +55 (21) 3594-0920
CELL: +55 (21) 8849-3336
E-Mail: renata@seacon-ap.com
Website: www.seaconworldwide.com

SEA CON **europa** **SEA CON (europe) LTD**

Seacon House, Hewett Road,
Capton Hall Industrial Estate,
Great Yarmouth, Norfolk, NR31 0RB, UK.
TEL: +44 (0) 1493-652733
FAX: +44 (0) 1493-652840
E-Mail: sales@seaconeurope.com
Website: www.seaconeurope.com

SEA CON **global** **SEA CON GLOBAL PRODUCTION**

Callejon Terrazos #8, Local 2-C,
Las Brisas 1ra. Seccion,
Tijuana, B.C., Mexico C.P. 22610.
TEL: +52 (664) 626-2726
FAX: +52 (664) 686-8922
E-Mail: sales@seaconglobal.com
Website: www.seaconglobal.com
Dial from U.S.A. TEL: +1 (619) 308-7901
TOLL FREE: (888) 562-7072
FAX: +1 (619) 308-7900

SEA CON **phoenix** **SEA CON PHOENIX, LLC**

15 Gray Lane, Suite 108,
Hopkinton Industrial Park,
Ashaway, RI 02804, USA.
TEL: +1 (401) 637-4952
FAX: +1 (401) 637-4953
E-Mail: sales@seaconphoenixllc.com
Website: www.seaconphoenixllc.com

Even though these procedures appear simple, only qualified technicians should perform the installation and maintenance.

Connectors are designed for installation on one atmosphere vessels. Contact **SEA CON®** for recommendations if using compensated vessels.

INSTALLATION PROCEDURES

Torque values referenced assume installation into dry metal threads. Bulkhead connector receptacle (BCR) o-ring should be lubricated with an appropriate silicone grease before installing. This lubricant should be applied to form an adequate film. Excessive lubrication is detrimental to the operation of the connector. Care must be taken to ensure no grease or dirt is present on the face of the fiber optic contact. Cleaning of the contact is recommended using only suitable products. CCP o-ring should be greased as above with the same care being taken.

CARE AND MAINTENANCE

Once mated the connector requires no maintenance. When stored all fiber contacts should be protected with suitable dust caps.

CABLE AND CONTINUITY PRESERVATION

Avoid sharp bends in cables. Cables subjected to vibration and exposed to seawater drag should be adequately clamped to prevent fatigue and possible failure.

SPECIAL ASSEMBLIES

SEA CON® maintains all facilities necessary to furnish complete underwater and environmental electrical connector/cable systems, including Research and Development, Engineering, Manufacturing, Quality Control and Pressure Testing. As well as supplying our standard 'off-the-shelf' items, we have the capability to design and manufacture SPECIAL CUSTOMIZED CONNECTORS AND CABLE ASSEMBLIES to suit your individual needs.

All reasonable efforts have been taken to ensure that the information contained herein is accurate at the date of publication, but no representation or warranty as to the accuracy or completeness of such information is intended or to be implied by its inclusion herein. Any and all representations and warranties pertaining to the information and products referred to herein shall be set forth in **SEA CON®** standard sales order form. In addition, **SEA CON®** reserves the right to make changes to the contents hereof without notice, therefore it is suggested that at the time of inquiry, the appropriate sales office or factory be contacted directly for verification of published specifications and products availability.

© 2012 **SEA CON®**

ALL RIGHTS RESERVED